



## MULTI PLUG AND PLAY HARNESS FOR GL 1800 7302

### PARTS INCLUDED

- 2 Electrical Multi Connector—GL 1800
- 1 Dielectric Grease Pack
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**


**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

**CAUTION!** Avoid potential electrical shock! Disconnect the battery before starting this procedure.

### FOR REAR INSTALLATION

**NOTE** You must have at least one Kuryakyn LED lighting accessory adapter installed on the motorcycle to use this product.

**STEP 2** Locate the six connector wire harness adapter under the rear fender panel. If you have more than one six connector harness installed, you may remove the unused ones. These conversion harnesses will power four accessory lights from one set. PIC 1

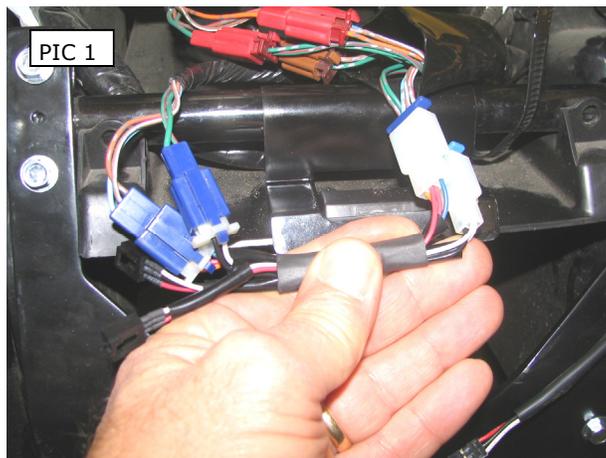

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



**ATTENTION!**

Küryakyn recommends the use of dielectric grease on electrical connections.

**STEP 3**


Unplug the three wire connector from the Led light harness to the adapter. Plug the male end of the Multi-connector into the three wire connector on the adapter. Plug the male three wire connector from the LED into on of the four three wire connectors on the Multi-connector. PIC 2

**NOTE**

You will gain eight outputs with one pair of connectors.

**ATTENTION!**

Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn WILL NOT issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

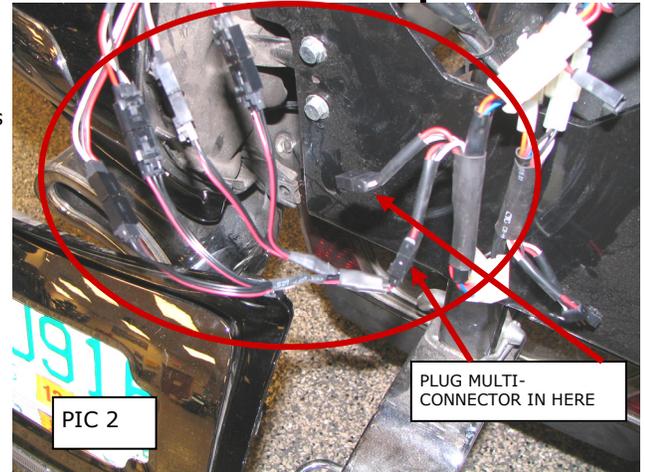

**FOR FRONT INSTALLATION**

**NOTE**

You must have at least one Kuryakyn LED lighting accessory adapter installed on the motorcycle to use this product.

**STEP 1**

Locate the accessory wire harness that powers the front Kuryakyn LED light installed on the bike. PIC 3

**STEP 2**

Unplug the three wire connector that leads to the LED light and plug in the Multi-connector to the power coming from the bike. Plug the three wire connector into one of the four three wire connectors on the Multi-connector. PIC 3

**NOTE**

You will gain eight outputs with one pair of connectors.

**ATTENTION!**

Küryakyn recommends the use of dielectric grease on electrical connections.

**ATTENTION!**

Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn WILL NOT issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

